




ST-001 / ST-001N

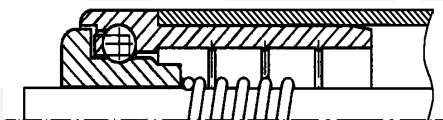

Tragrollenlager aus thermoplastischem Kunststoff mit einer Kugelreihe. Die Kugeln sind in Stahl (ST-001) oder in Niro W-Nr 1.4034 (ST-001N) erhältlich.

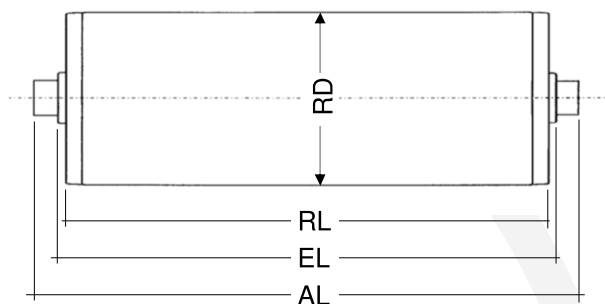

Rohr-Ø	Achse-Ø	Rohrausführung								maximale Tragfähigkeit pro Rolle*											
		S	SV	SG	SP	N	PG	PB	ALU	001	001N										
16x1	6	●	●			●				6	6										14
20x1,5	6,8	●	●			●	●	●	●	10	10										16
30x1	6,8,10	●	●	○	●	●				14	14										16
30x1,5	6,8,10	●	●	○	●	●				14	14										16
30x1,8	6,8,10						●	●		14	14										16
40x1,5	6,8,10	●	●	○	●	●				14	14										16
40x2,3	6,8,10						●	●		14	14										16

										
	Rohr-Ø	Achs-Ø	EL=	Innen- gewinde IG	Schlüssel fläche S	Feder- achse F	Glatt G	Aussen- gewinde AG	Abgesetzt Aussen- gewinde BG	
	16x1	6	RL+			3	3	13		
		6	RL+			5	5	15		
		8	RL+			5	5	18		
		10	RL+	6	5	5	5	15	5	

* - Um die Tragfähigkeit der Achsen und Rohre zu bestimmen, benutzen Sie bitte das Diagrammblatt auf Seite 3.

Andere Ausführungen auf Anfrage.

○ - Ausführung auf Anfrage
● - im Standard-Programm

Bestellbeispiel

ST-001N-20x1,5N A8F EL=372